

## **MINI-RASMUS PRE-SCRAPER WITH POLYURETHANE BLADE** – For compact installations.

Mini-Rasmus pre-scraper is a smaller version of Rasmus pre-scraper 8300, with torsion springs made of polyurethane and steel. The scraper blade's fixing to the beam makes it easy to remove (without tools) when replacing the blade and when cleaning. The simple holder guarantees easy assembly and functionality.


Spare blades are available and in stock for all belt widths.

Vendig's unique spring lever ensures that the correct pressure is maintained against the belt which reduces maintenance and prolongs the lifespan of the scraper and the conveyor belt. The pre-scraper shall be positioned against the drive pulley immediately below the flow of material.

Recommended for Ø 100-250 mm pulleys.



Mini-Rasmus blade full length spare part 8042 is 2.4m

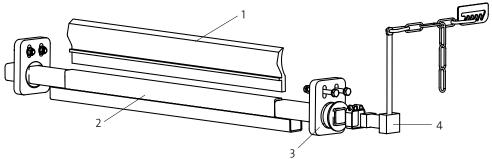


Belt direction

- 1. Polyurethane scraper blade
- 2. Beam
- 3. Holder H complete 8388
- 4. Lever arm complete 8083

All steel parts are electro-galvanized as standard. Stainless steel or powder-coated alternatives are available on request.

From B-W 1000 the scraper is supplied with dual lever arms. From B-W 1600 the scraper is supplied with Holder HD.

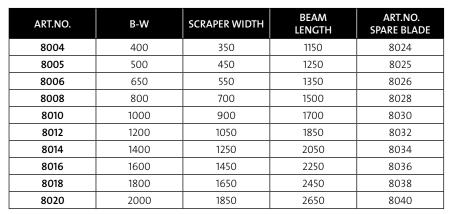

Wider belt cleaners can be offered on request. Lillrasmus, total length = 2.4 m art.no. 8042